


# TELLER SAFE




|               | TSF-502-B | TSF-502-B | TSF-503-D | TSF-504-D | TSF-506-d |
|---------------|-----------|-----------|-----------|-----------|-----------|
| drap          | 0         | 2         | 0         | 0         | 0         |
| 89 cm drawer  | 0         | 2         | 3         | 6         | 0         |
| 179 cm drawer | 0         | 1         | 0         | 0         | 0         |
| 269cm drawer  | 2         | 0         | 0         | 0         | 0         |
| 124 kg        | 124 kg    | 136 kg    | 144 kg    | 0         | 0         |

|                           |  |
|---------------------------|--|
| Appearance                | Width 500mm x Depth 530mm x Height 680 – 700mm |
| Weight (exclusive of UPS) | 124kgs – 165 KGS (Subject to the models)       |
| Drawer Quantity (Option)  | 2 – 6 PCS (Subject to the models)              |
| Power Supply              | AC/110V 60HZ DC12V                             |
| UPS System                | DC12V UPS (Weight : 3kgs)                      |
| Base Fixing               | W 3/8" Bolt                                    |
| Color                     | Cream  |
| Time Delay                | From 0 second to 99 minutes                    |
| Multi Users               | From one to nine users                         |
| Keypad                    | Thin type keypad                               |
| Alarm output connecting   | (1 NO 2 COM) Circuit –closed/off during alarm  |
|                           | (1 NO 2 COM) Circuit –closed/on during alarm   |
| Computer Connector        | One set of RS-232 connector                    |

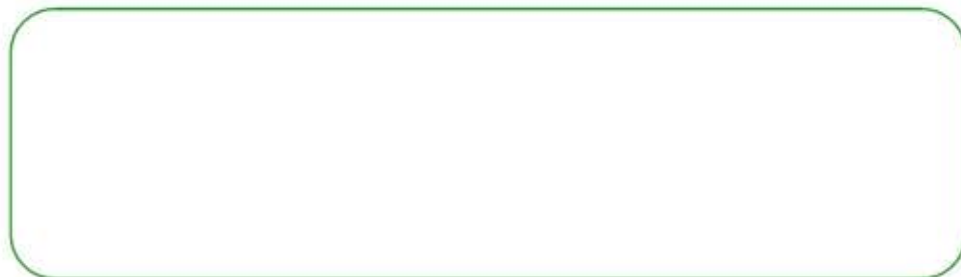

Manufacturer reserves the right to change product specifications without



**TELLER SAFE** are designed to provide easy to use facilities for the secure and effective storage and dispensing of cash within a working retail/banking environment on a daily basis. Their versatile construction and software facilities means the units can be adapted to suit the customer's individual requirements.



Nine Cashiers and one chief cashier - a Master can operate with Cash teller safe. After turning of a main key, the multifunction display is activated and asks for security entrance code.

The teller safe communicates in a dialogue mode in a TFT-LCD monitor. Each cashier has a code, which is 6 digit number. Once their code has been entered, a cashier can start the work, with access which enables them to open drawers and quit the operation. Internal protection means that the access one cashier has to the system is determined by the completed work of a previous cashier.

Chief Cashier has access to the following settings:

Entering codes, erasing codes, setting time-delay drawers, changing access to selected drawers, time window, changing codes, setting max. number of drawers that can be opened at once, setting sound signal of open drawers, connection to PC through RS 232 etc. All events are recorded in memory.

#### WORKING WITH YOU

Labels warn all visitors about the presence of teller safe with time delay lock and point out that staff cannot speed up their opening. They have a high preventive effect, sometimes just due to the fact that nobody from the outside knows what particular units and safes these labels refer to. Labels are placed on the entrance door, cashier's desk and counter directed to the customer.

- Constructed by double layers of high tensile steel plate to prevent striking; color coated metal parts. Designed to drawer type at bank teller's
- Controlled by high-tech computer system, provides superior burglary-resistant function and easy operation.
- When the Safe is forced to open by burglar, it will send silent alarm whenever user is keying-in password or opening drawer.
- Available to set time delay function from 0 second to 99 minutes, drawer will open exactly as the setting time.
- Equipped with two concealed money deliver holes, bank tellers can categorize notes, coins
- Eliminate confusion causes by many people using the same Safe, particular drawer can be appointed to open by some user exclusively.
- Installed UPS system to support electricity in case of power off.
- Main administrator may set users from 1 to 9 people, user can only open exclusive drawer and forbids for other actions. Main administrator is prohibited to open drawer but available to change the password, cancel or increase users as well as the authority setting.
- With key controller. Keypad does not operate when key is not introduced. Three times of sign-in password in error, both computer and keypad will be locked three minutes automatically, and will send alarm signal during the time. Great security function to avoid users who are not authorized to open Safe surreptitiously
- Each Safe is prepared for fixing device to the floor in order to prevent from stealing.
- TFT-LCD monitor, showing Date and time when the device is closed. Main administrator and users can follow the steps to operate when the device is working.
- Each drawer is able to load weight of 75kg.
- Available to link with other computer for searching the operation records and further printing 100 records.