


CLASSIC VAULT DOOR



		Classic 2 inch	Classic 3 1/2 inch	Classic 5 inch	Classic 7 inch
UL class		CLASS M	CLASS 1	CLASS 2	CLASS 3
Clear opening	W	36"	36"	36"	36"
	H	78"	78"	78"	78"
Door thickness		2"	3-1/2"	5"	7"
Overall thickness		9-1/16"	9-1/16"	10-1/2"	12-1/2"
Standard	W	54-5/16"	54-5/16"	54-5/16"	55-1/8"
Architrave	H	84-5/8"	84-5/8"	84-5/8"	84-5/8"
Swing radius	R	41-7/8"	41-7/8"	41-7/8"	41-7/8"

- Swing 180° right or left as required.
- Floor level : Flat sill with full 36" clear opening

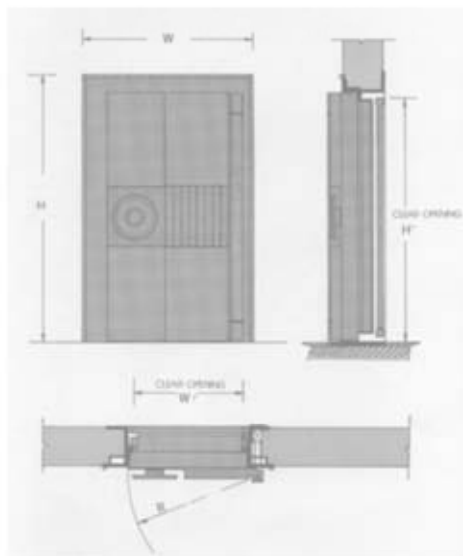

X YOUNG ANN

Manufacturer reserves the right to change product specifications without notice.



X YOUNG ANN



THE CLASSIC
VAULT DOOR
COMBINES THE
UL TIMATE IN
SECURITY WITH
THE BEAUTY OF
CONTEMPORARY
STYLING

TRULY THE
INTERNATIONAL
STANDARD FOR
SECURITY AND
DESING



Underwriters Laboratory testing
UL Listed Class M · 1 · 2 · 3 ·



STAINLESS STEEL FINISH

All Exposed metal surfaces are finished in gleaming stainless steel including the massive full length locking bar, door edges and jamb area creating a totally maintenance free door. Classic' adjustable door hinges have precision anti-friction tapered bearings balancing the door so perfectly that it can be opened and closed with the touch of a finger.



WIDE CLEAR OPENING

The large 36" clear opening and flat sill allow convenient access for people and carts

OPTIONAL ARCHITRAVE PANELS

The extra wide stainless steel architrave with Classic style doors virtually eliminate the need for additional architrave panels. Should a wider look be desired, stainless steel architrave panels are available.



DELUXE DAYGATE STANDARD

Classic's standard daygate features a stainless steel grid with lock panel to match. Key operation is used with the stainless steel bar style daygate.

LOCKING SYSTEM

The decorative operating wheel activates the full length locking bar. Assuring total top to bottom contact with the doors locking jamb. The "DELTA" locking system virtually eliminates potential "lock out" due to combination lock failure. Classic vault doors are the nations first to introduce this important security feature.

DAY GUARD LOCK

When activated, a daytime safety detent lock secures the locking bar in a open position and designed to prevent locking personnel inside the vault under holdup conditions.

BUILT IN VENTILATOR

The classic emergency ventilator is built into the vault door frame, eliminating the need for space consuming wall ventilator installation. Classic vault doors conceal the emergency ventilator behind the hinge cover, eliminating unsightly ventilator hole, in all other vault door.

TIME LOCK

Underwriters Laboratory (UL) Listed 3 movement time locks are concealed behind the flush panel on the back of each Classic door. Magnifying lenses cover each movement for easy viewing.

ADDITIONAL SECURITY

Classic's built-in stainless steel contact micro switch is located in the door frame to effect an alarm contact when the door is closed and the massive bar lock is engaged. The additional security feature prevents bank personnel from closing the door without locking the bar lock system. It also eliminates the need for external magnetic contact switches and unsightly wires characteristic with old fashioned door /alarm hook ups.