

**U.L. Listed**

Underwriters Laboratories certified burglary resistance and a one-hour manufacturer's fire rating for your peace of mind.

**Locks**

U.L. listed manipulation resistant high-security combination lock with spy-proof dial.

**Key Lock**

The TREASURE is prepped to accept an optional, high security auxiliary key lock.

**Full Composite Construction**

All six sides of the TREASURE are shielded by our proprietary barrier matrix enclosed within a high strength steel form.

**Boltwork**

Massive 1.5" diameter chromed high tensile steel bolts interlock within reinforced bolt chambers.

**Glass Relockers**

A sophisticated tempered glass relock trigger activates multiple independent locking systems to protect against severe burglary attacks.

**Hinges**

High quality adjustable ball bearing hinges provide years of dependable service.

**Adjustable Shelves**

All models are supplied with adjustable shelves.



**TOOL RESISTANT SAFE CLASS TL**



**TREASURE TL SERIES**

The DURAVault offers the ultimate in TL security. With its 3.5" thick body and 4" thick door comprised of the latest generation of high strength alloys combined with our proprietary barrier material, the TREASURE is a burglar's worst nightmare. In order to achieve the highest quality and level of security, the bolt mechanism as well as its inner and outer plates are laser cut and formed for the highest degree of accuracy.

Add to these strengths our anti-penetration grid and sophisticated glass relocking system for the best TL safe GUARANTEED!

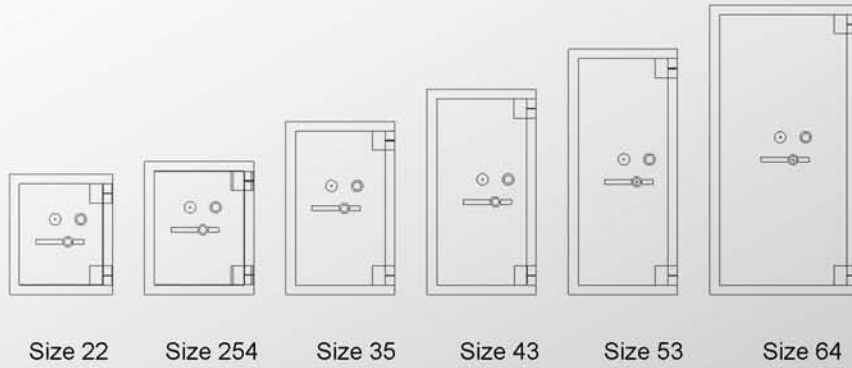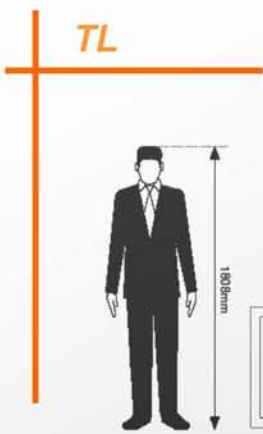

**Options available**

- U.L. listed electronic digital locks • Time locks • Inner compartments

**TL15**

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TL15-22	750	640	605	570	460	360	1,181	1,160	521	0.09
TL15-25	830	680	665	650	500	420	1,281	1,240	623	0.14
TL15-35	1,080	680	665	900	500	420	1,281	1,240	768	0.19
TL15-43	1,280	680	775	1,100	500	530	1,391	1,240	968	0.29
TL15-53	1,530	680	775	1,350	500	530	1,391	1,240	1,123	0.36
TL15-64	1,805	915	665	1,625	735	420	1,516	1,710	1,264	0.50

**TL15X6**

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TL156-22	750	640	605	570	460	360	1,181	1,160	507	0.09
TL156-25	830	680	665	650	500	420	1,281	1,240	606	0.14
TL156-35	1,080	680	665	900	500	420	1,281	1,240	745	0.19
TL156-43	1,280	680	775	1,100	500	530	1,391	1,240	943	0.29
TL156-53	1,530	680	775	1,350	500	530	1,391	1,240	1,093	0.36
TL156-64	1,805	915	665	1,625	735	420	1,516	1,710	1,385	0.50

**TL30X6**

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TL306-25	830	680	685	650	500	420	1,301	1,240	626	0.14
TL306-35	1,080	680	685	900	500	420	1,301	1,240	770	0.19
TL306-43	1,280	680	795	1,100	500	530	1,411	1,240	967	0.29
TL306-53	1,530	680	795	1,350	500	530	1,411	1,240	1,122	0.36
TL306-64	1,805	915	685	1,625	735	420	1,536	1,710	1,440	0.50