

Lock option

You can choose both of several locks: key lock , combination lock, electronic lock ,time lock variation possibilities, Dual locking is an standard for all models. All the locks are tested to conform with requirement of UL



Combination lock standard




Key lock standard



Electronic lock option



Time lock option

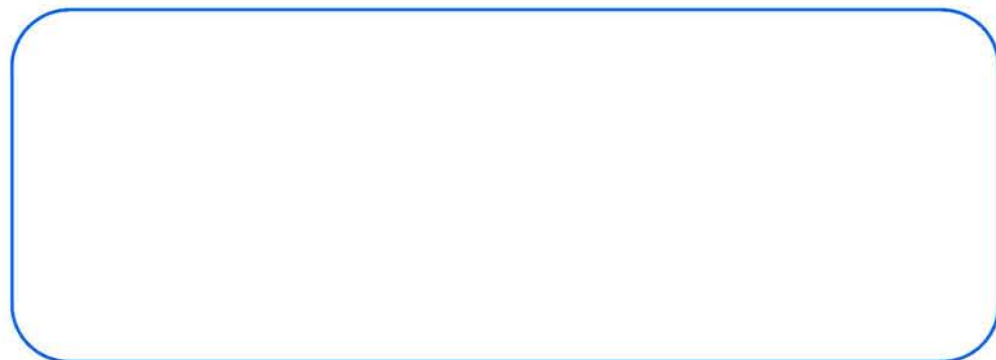

UL TRTL-15X6, 30 & 30X6 safe

Manufacturer reserves the right to change product specifications without notice.





The Treasure TRTL15X6 TRTL30 & TRTL30X6

Protection and Craftsmanship Combined!

The Treasure TRTL safe is the newest safe this class to pass the U.L. test. The safe utilizes the newest, and most revolutionary technology to form the strongest safe to pass this most severe test. Massive copper plates incorporated into our patented composite material achieving over 30,000 pounds of compression strength, making this into one of the most formidable defensive barriers have ever offered.



Product Specificatio

TRTL15X6

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TR156-27	910	750	690	700	540	420	1366	1365	929	0.16
TR156-34	1,110	750	690	900	540	420	1366	1365	1088	0.20
TR156-43	1,310	750	800	1,100	540	530	1476	1365	1364	0.31
TR156-53	1,560	750	800	1,350	540	530	1476	1365	1578	0.39
TR156-64	1,835	945	690	1,625	735	420	1561	1755	1956	0.50


TRTL30

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TR30-27	910	750	710	700	540	420	1386	1365	1006	0.16
TR30-34	1,110	750	710	900	540	420	1386	1365	1185	0.20
TR30-43	1,310	750	820	1,100	540	530	1496	1365	1444	0.31
TR30-53	1,560	750	820	1,350	540	530	1496	1365	1718	0.39
TR30-64	1,835	945	710	1,625	735	420	1581	1755	2172	0.50

TRTL30X6

MODEL	External (mm)			Internal (mm)			Total Width Door 90(F)	Total Width With door Fully open (G)	Weight kg	Capacity cubic meter
	Height (A)	Width (B)	Depth (C)	Height	Width (D)	Depth (E)				
TR36-27	910	750	710	700	540	420	1386	1365	1114	0.16
TR36-34	1,110	750	710	900	540	420	1386	1365	1310	0.20
TR36-43	1,310	750	820	1,100	540	530	1496	1365	1657	0.31
TR36-53	1,560	750	820	1,350	540	530	1496	1365	1922	0.39
TR36-64	1,835	945	710	1,625	735	420	1581	1755	2373	0.50

TRTL

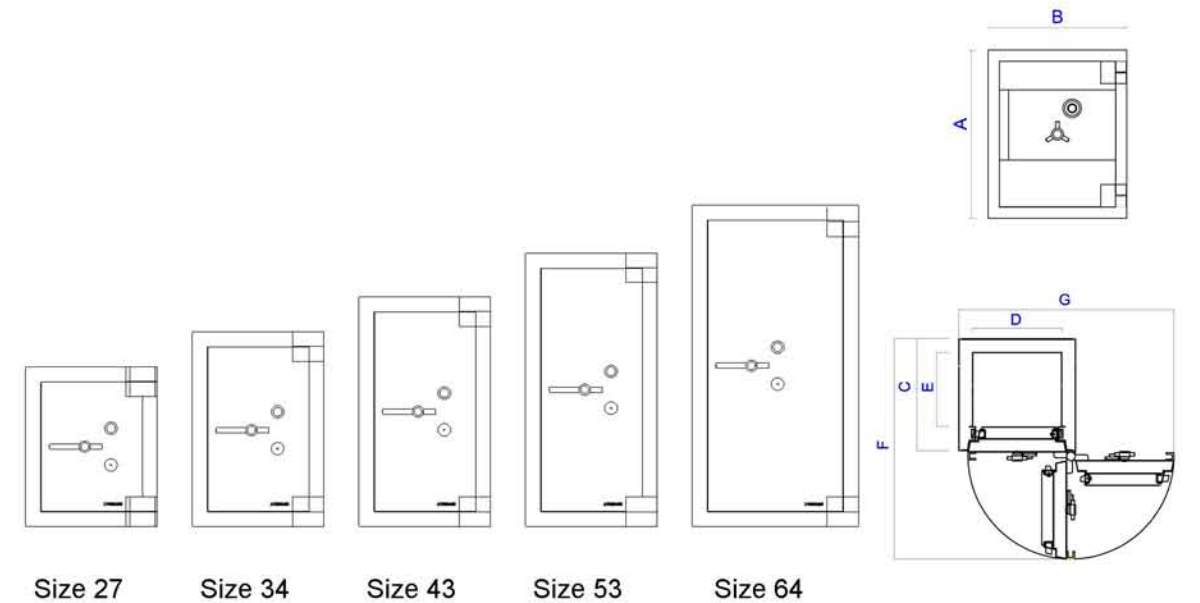

Testing



TORCH AND TOOL RESISTANT SAFE CLASS TRTL

- Rating: UL Listed TRTL
- Resists the most sophisticated means of concentrated attacks by tool, torch, drilling and explosives
- Built from a new and unique Alceramix Barrier material with bell cast body
- Heavy-duty 3-way boltwork mechanism
- Glass plate with active relocking devices
- UL Group I manipulation proof combination lock and UL high security changeable key lock

Finish

All the Treasure is finished in quality grey paint to suit most office environments