



SECTION

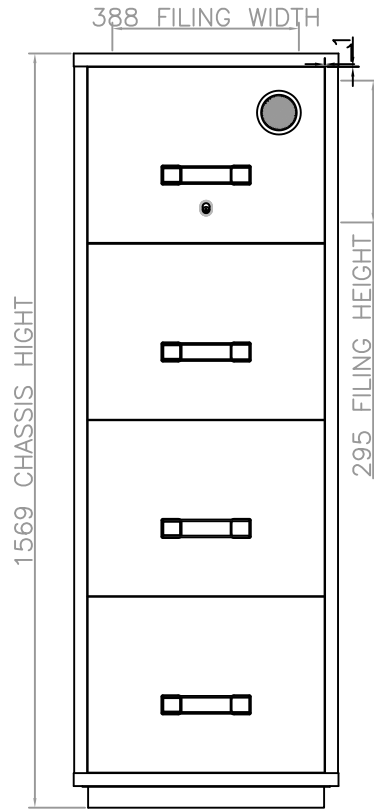


EXTERNAL ELEVATION

MODEL:FC2-4-824  
 NET WEIGHT:418  
 GROSS WEIGHT:432  
 CONTAINER 20' 26 UNIT  
 CONTAINER 40' 54 UNIT

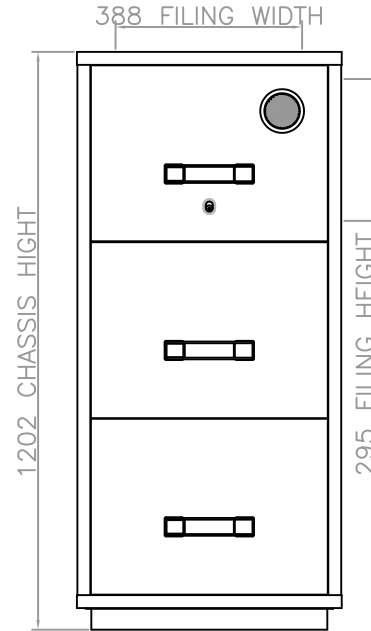

EXTERNAL ELEVATION

MODEL:FC2-3-824  
 NET WEIGHT:314  
 GROSS WEIGHT:328  
 CONTAINER 20' 26 UNIT  
 CONTAINER 40' 54 UNIT

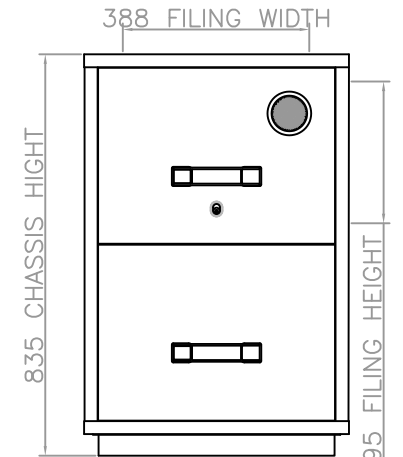

EXTERNAL ELEVATION

MODEL:FC2-2-824  
 NET WEIGHT:232  
 GROSS WEIGHT:246  
 CONTAINER 20' 52 UNIT  
 CONTAINER 40' 106 UNIT

**SPECIFICATIONS:**

UL LISTED:  
 UL 72 Class 350 Fire label. Tests include 2 hour exterior fire exposure at 1700°F, a 2000°F explosion test.

**FIREPROOF INSULATION**  
 100% gypsum, reinforced by a 1" by 2" lattice made of 14-gauge galvanized welded steel wire, providing complete peace of mind from fire, impact, or explosion.

**LOCKS:**  
 3 wheel combination lock., High-security key locks .

**SURFACE:**  
**FINISH** In an environmentally-friendly electrostatic powder coating applied to all sides, including bottom. The finish is scratch-resistant, providing a lifetime quality appearance .



REVISION	DATE	DESCRIPTION	DRAWN BY	DESIGNED BY	SCALE	PROJECT	DRAWING NAME	PROJECT No.	DRAWING No.
-	-	-	EMMA	-	NIL	-	FILE CABINETS FC2-4-824 FC2-3-824 FC2-2-824	-	FC-020102
			CHECKED BY	APPROVAL	DATE	-	UL 72-350 2 HOURS LISTED	-	
			-	-	2008-2-19	-			